





ME060 Male Connector with Soldering Pin



ME060-762



ME060-762..A1

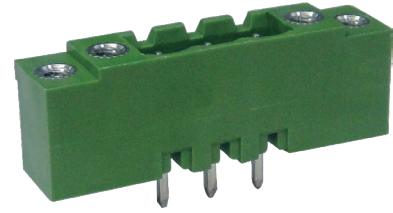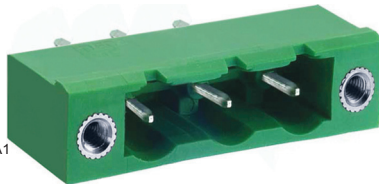

DIMENSIONS/POSITIONS

	ME060-762	ME060-762..A1
Pitch	7.62mm	7.62mm
Poles	2 ~ 16Poles	2 ~ 16Poles
Dimension A	7.62mm	7.62mm
Length	A= 7.62xP+10.38mm(P≥2)	A= 7.62xP+20.54mm(P≥2)
Housing Material	PA 66	PA 66
Pin Dimensions	Brass, Tin Plated	Brass, Tin Plated
PCB Hole Diameter	1.5mm	1.5mm
Operating Temperature	-40°C to +105°C	-40°C to +105°C

TECHNICAL DATA

Connection in acc. with standard EN-VDE		
Nominal Current I _N	16A	16A
Nominal Cross Section	-	-
Maximum load current	16A	16A
Insulating Material	PA	PA
Inflammability class acc. to UL94	V0	V0
Nominal voltage, UL/CUL	300V	300V
Nominal current, UL/CUL	15A	15A

