
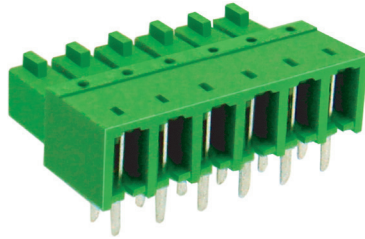


MF213 Connector



DIMENSIONS/POSITIONS

MF213-381

Pitch	3.81mm
Poles	2 ~ 24Poles
Dimension A	3.81mm
Length	$A=3.81 \times P + 0.80 \text{mm} (P \geq 2)$
Housing Material	PA 66
Wire Protector	Phosphor Bronze, Tin Plated
PCB Hole Diameter	1.2mm
Operating Temperature	-40°C to +105°C

TECHNICAL DATA

Connection in acc. with standard EN-VDE	
Nominal Current I_N	7A
Nominal Cross Section	-
Maximum load current	7A
Insulating Material	PA
Inflammability class acc. to UL94	V0
Nominal voltage, UL/CUL	300V
Nominal current, UL/CUL	7A

