
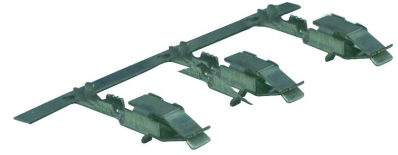



# MF316 Connector



## DIMENSIONS/POSITIONS

MF316-508

BM04-MF300F01T

Pitch	5.08mm
Poles	2 ~ 3Poles
Dimension a	5.08mm
Length	A=5.08xP(P≥2)
Housing Material	PBT
Wire Protector	Phosphor Bronze, Tin Plated
Operating Temperature	-40°C to +120°C

## TECHNICAL DATA

Connection in acc. with standard EN-VDE	
Nominal Current I <sub>N</sub>	10A
Nominal Cross Section	-
Maximum load current	10A
Insulating Material	PBT
Inflammability class acc. to UL94	V0
Nominal voltage, UL/CUL	300V
Nominal current, UL/CUL	10A

