
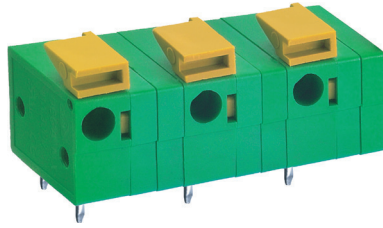


# MX222 PCB Spring Type Terminal Block



## DIMENSIONS/POSITIONS

MX222-016

|                       |                        |
|-----------------------|------------------------|
| Pitch                 | 10.16mm                |
| Poles                 | 2 ~ 16Poles            |
| Dimension A           | 10.16mm                |
| Length                | A= 10.16xP-2.54mm(P≥2) |
| Housing Material      | PA 66                  |
| Cover                 | PA 66                  |
| Contact               | Brass, Tin Plated      |
| Spring                | Stainless Strip Steel  |
| Wire Size             | 14 ~ 24AWG             |
| PCB Hole Diameter     | 1.4mm                  |
| Operating Temperature | -40°C to +105°C        |

## TECHNICAL DATA

|   |                    |
|---|--------------------|
| Connection in acc. with standard EN-VDE |                    |
| Nominal Current I <sub>N</sub>          | 16A                |
| Nominal Cross Section                   | 2.5mm <sup>2</sup> |
| Maximum load current                    | 16A                |
| Insulating Material                     | PA                 |
| Inflammability class acc. to UL94       | V0                 |
| Nominal voltage, UL/CUL                 | 300V               |
| Nominal current, UL/CUL                 | 10A                |

